

Cat 6 F/UTP

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Tested from 1 to 555 MHz.
- Proven shield technology improves RFI and EMI performance.
- Supports up to 100 watts of power.

Packaging

- 1,000 foot (305m) reels

Applications

- Including:
 - HDBase-T A & B
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40C to +60C (-40F to +140F)
- Installation Temperature
0C to +60C (+32F to +140F)
- Operation Temperature
-20C to +75C (-4F to +167F)

Category 6 F/UTP (Plenum)

(c(UL)us Listed Type CMP, CSA Type FT6)

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D.		CABLE WEIGHT lbs/1000ft	kg/305m
		in.	mm		
30154-8-XXY	4	.275	6.98	40.33	18.29

Category 6 F/UTP (Riser)

(c(UL)us Listed Type CMR, CSA Type FT4)

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D.		CABLE WEIGHT lbs/1000ft	kg/305m
		in.	mm		
30129-8-XXY	4	.29	7.37	39.02	17.70

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30154	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)

Features

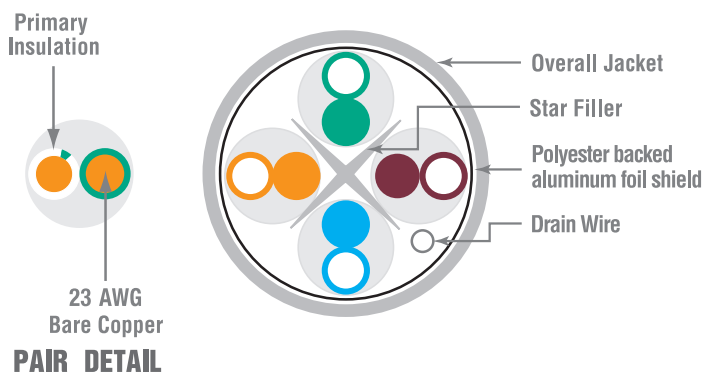

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Flame-retardant thermoplastic	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic
Star Filler	Flame-retardant thermoplastic	Plenum-rated polymer

Hitachi Cable America reserves the right to revise any specifications.

Electrical Characteristics

Input impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (101 to 250 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	68%, riser 70%, plenum
Voltage Rating	300 Volts
Ampacity ¹	.5 Amps/conductor



Photo is for representation purposes only.

Transmission Specifications

ANSI/TIA 568-C.2 Category 6 Verified

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	74.3	72.3	72.3	72.3	72.3	70.3	70.3	67.8	67.8	64.8	64.8	20.0	20.0
4	3.8	3.8	65.3	65.3	63.3	63.3	61.5	61.5	59.5	59.5	55.8	55.8	52.8	52.8	23.0	23.0
8	5.3	5.3	60.8	60.8	58.8	58.8	55.4	55.4	53.4	53.4	49.7	49.7	46.7	46.7	24.5	24.5
10	6.0	6.0	59.3	59.3	57.3	57.3	53.3	53.3	51.3	51.3	47.8	47.8	44.8	44.8	25.0	25.0
16	7.6	7.6	56.2	56.2	54.2	54.2	48.7	48.7	46.7	46.7	43.7	43.7	40.7	40.7	25.0	25.0
31.25	10.7	10.7	51.9	51.9	49.9	49.9	41.2	41.2	39.2	39.2	37.9	37.9	34.9	34.9	23.6	23.6
62.5	15.4	15.4	47.4	47.4	45.4	45.4	32.0	32.0	30.0	30.0	31.9	21.9	28.9	28.9	21.5	21.5
100	19.8	19.8	44.3	44.3	42.3	42.3	24.5	24.5	22.5	22.5	27.8	27.8	24.8	24.8	20.1	20.1
200	29.0	29.0	39.8	39.8	37.8	37.8	10.8	10.8	8.8	8.8	21.8	21.8	18.8	18.8	18.0	18.0
250	32.8	32.8	38.3	38.3	36.3	36.3	5.5	5.5	3.5	3.5	19.8	19.8	16.8	16.8	17.3	17.3
350*	-	39.8	-	36.1	-	34.1	-	-	-	-	-	16.9	-	13.9	-	16.3
555*	-	52.0	-	33.1	-	31.1	-	-	-	-	-	12.9	-	9.9	-	14.9
660*	-	57.7	-	32.0	-	30.0	-	-	-	-	-	11.4	-	8.4	-	14.4

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

1. Ampacity rating per NEC 725.144 of NFPA NEC (2017) up to 192 cable bundle.