


# Hookup Wire

UL Style: 1571/10064/1061  
 UL Voltage Rating: 30V/30V/300V  
 UL Temp: 80°C/105°C/80°C

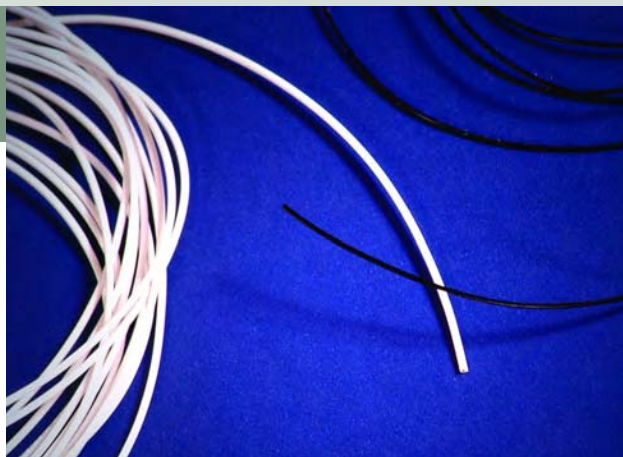

PVC, Irradiated Cross-Linked PVC, and ETFE insulations available.

Various colors and gauges available upon request.

UL approved.

Suitable for JST connectors.

**APPLICATIONS** Internal wiring of electronic equipment.

Eco-Index: RoHS Values

<1000ppm <100ppm <1000ppm <1000ppm <1000ppm

Pb

Cd

Cr+6

Hg

PBDE's  
PPB's

**PHYSICAL CONSTRUCTION DESCRIPTION** Insulated hook-up wire, consisting of 1 conductor, unshielded, and unjacketed.



Part No.	Conductor	Insulation	UL Style	Conductor Resistance Ω/Mft. @20°C	Insulation Resistance MΩ/KFT @20°C	JST Connector
40565-1-S-10000	28 7/36	XL PVC	1571	68	3	ZR
40564-1-S-8000	30 7/38	XL PVC	1571	108	3	SR
40566-1-S-16000	32 7/40	XL PVC	1571	182	3	SSR
40462-1-S-4000	32 7/40	ETFE	10064	224	305	SUR
40085-1-10000	28 7/36	PVC	1061	68	4000	DS/KR

Notes: Some products in stock in white; consult factory for details.  
 All data is for reference only and is subject to change.